



Since : 2000

ISO 9001:2008 Certified Co.

EOT Crane DSL BUSBAR Systems
FESTOON Systems
BOX TYPE DSL Systems
PENDANT Stations



ISO 9001:2008 Certified Co.



Pendent Stations



Material :

Unbreakable

Quality :

IP65 (100% Water Proof)

CE & ISO Certified.

3 Step Safety

Flexible Movement with

High Switching Capacity

Special Hand Grip for Controlling

Guarantee :

1 Year

Use :

It is Used for hoist control to control circuits in both single or double speed.

SRP PS-S2	2 Push Buttons With Mechanical Interlock + Emergency Stop (2+1)
SRP PS-S4	4 Push Buttons With Mechanical Interlock + Emergency Stop (4+1)
SRP PS-S6A	6 Push Buttons With Mechanical Interlock + Emergency Stop (6+1)
SRP PS-S6B	6 Push Buttons With Mechanical Interlock + Emergency Stop + Start (6+2)
SRP PS-S8	8 Push Buttons With Mechanical Interlock + Emergency Stop + Start (8+2)
SRP PS-P1	Single Speed Contact Switch
SRP PS-P2	Double Speed Contact Switch

*All Models Available in Both Single & Double Speed

- All Parts Made Under One Roof
- Made in India. ● First time In India.


Festoon System

C RAIL FESTOON SYSTEM

Festoon systems are used to manage electrical cable and or air hosing. They are a clean low resistance method for distributing power to hoists, cranes, trolleys, and any number of different types of moving equipment.



FESTOON SYSTEM ACCESSORIES



C-Rails

- | | |
|--|---|
| 1 Fixed End Junction Box | 10 Control Unit Trolley with J-Box,
OR Quick disconnect control unit
Trolley(Not Shown) |
| 2 Terminal Strips(Inside Junction box) | 11 Track Joint Assembly |
| 3 Cable Connectors | 12 Penant Cable |
| 4 End Clamp | 13 Push-Button Pendant Station |
| 5 Track hanger Clamp Assemble | 14 Tow Arm |
| 6 Intermediate Trolley | 15 Tow Trolley |
| 7 Cross Arm Support Channels | 16 Flat PVC Cable |
| 8 Beam Clamp
(For cross arm support channels) | 17 End Stop |
| 9 C-Track Channel | |

Applications of C Rail Festoon System :

- Overhead Cranes & Port Cranes
- To Electrify Many Mobile Equipments.
- Any other Material handling equipments.

Features :

- Light Weighted
- Less Friction & Smooth Motion
- Simple & Safe installation

C-Track Trolley
(Whole Plastic)

Hanger Clamp



Towing Trolley



Track Couplers



Towing Arm



Towing Trolley

Steel Trolley
(Powder Coated)

Current Collector For EOT Crane



← **SRP CC-01**

SRP CC-03 →




Current Collector (60A To 250A)

FEATURES :

- | Easy and Safe to Connect
- | Top Quality
- | Economical prices
- | High strength
- | Better Performance
- | Compact Size
- | Good Control
- | Power Efficient
- | Touch Proof
- | Safe to Handle

I-Beam Cable Trolley

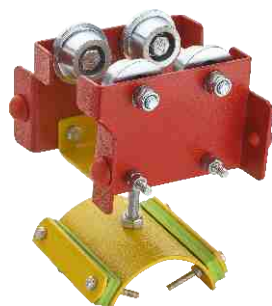

- | **Quality :**
High Quality Material, Powder Coated
- | **Usage :**
For Round & Flate Cable
- | **Ideal Usage :**
For Cranes & Hoists
- | **Size :**
50 mm to 80 mm

ISO 9001:2008 Certified Co.



DSL Shrouded Busbar System



PINJOINT BUSBAR (M Type 100-315 Amps)

Conductor Busbar System	Galvanized	Copper	Aluminum / SS
Current (A)	60 - 125 amp	160-400 amp	200-315 amp



4 Pole Hanger
(M Type)



1 Pole Hanger



Joint Cover



Copper Shoe
with Holder

BOLT JOINT BUSBAR (W Type 60-400 Amps)

Conductor Busbar System	Galvanized	Copper
Current (A)	80-125 amp	160-315 amp



4 Pole Hanger
(W Type)



3 Pole Hanger




1 Pole Hanger



Single Collector
Bracket



Steel Jointer



Joint Cover



End Power feed



End Cap



Towing Bracket



Steel Jointer



Copper Jointer



250 A Current Collectors





Current Collector


ISO 9001:2008 Certified Co.




Electric Crane Cable Carrier Small & Big

Model No. SRP A-1  Wire Rope Die 10 mm Cable Clamping Dia : 7 mm to 14 mm	Model No. SRP A-2  Wire Rope Die 15 mm Cable Clamping Dia : 16 mm to 20 mm	Model No. SRP A-3  Wire Rope Die 15 mm Cable Clamping Dia : 7 mm to 14 mm	Model No. SRP A-4  Wire Rope Die 10 mm Cable Clamping Dia : 16 mm to 20 mm
Model No. SRP B-1  Wire Rope Die 10 mm Round Cable Dia : 26 mm	Model No. SRP B-2  Wire Rope Die 10 mm Big Round Cable Dia : 36 mm	Model No. SRP B-3  Wire Rope Die 15 mm Round Cable Dia : 26 mm	Model No. SRP B-4  Wire Rope Die 15 mm Big Round Cable Dia : 36 mm
Model No. SRP D - 1  Wire Rope Die 10 mm Cable Clamping Dia : 13 mm to 18 mm	Model No. SRP D - 2  Wire Rope Die 15 mm Cable Clamping Dia : 13 mm to 18 mm	Model No. SRP E - 1  Wire Rope Die 10 mm Metal Cable Clamping Dia : 15 mm to 33 mm	Model No. SRP E - 2  Wire Rope Die 10 mm Metal Cable Clamping Dia : 15 mm to 33 mm
Model No. SRP F - 1  Wire Rope Die 10 mm Metal Cable Clamping Dia : 13 mm to 18 mm	Model No. SRP C-1  Wire Rope Die 10 mm Single Cable Flat : 15 mm to 35 mm	Model No. SRP C-3  Wire Rope Die 15 mm Single Cable Flat : 15 mm to 35 mm	Model No. SRP F - 2  Wire Rope Die 10 mm Metal Cable Clamping Dia : 7 mm to 14 mm

ISO 9001:2008 Certified Co.

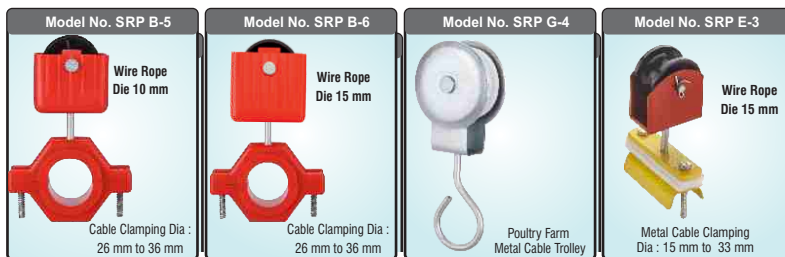

Plastic Unbreakable Push Button Unit

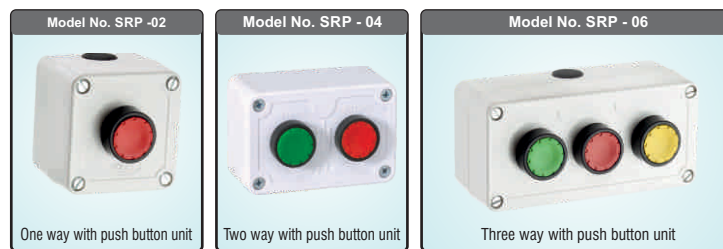

Gym Wheel - Bearing Size : 6001Z, Rope Size 10 mm (Double Bearing)



